


acrotrack mini | long

We aim to create cleaner ceilings.
Show what you want, hide what you need.



luminaire specs	3
configure yours	4
finishes	5
luminaire output	6
accessories	8
acrotrack overview	9

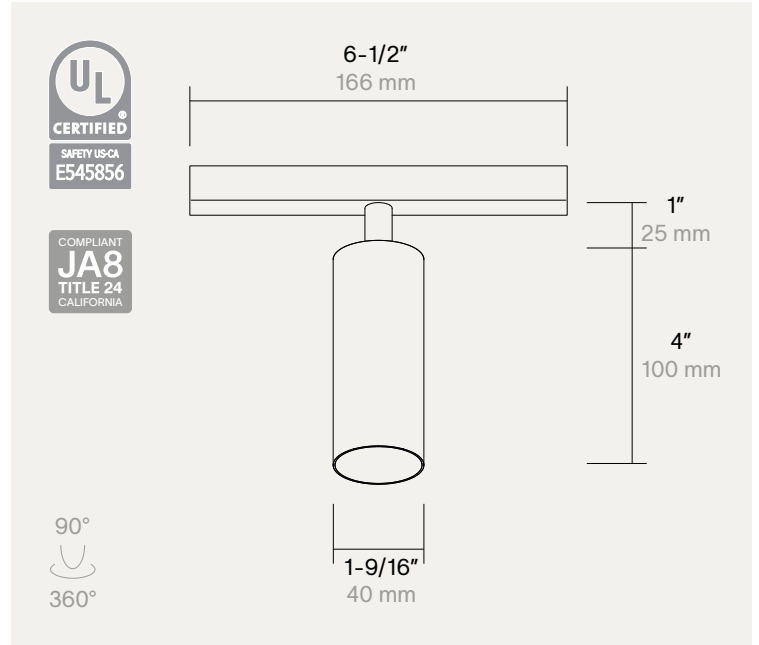

acrotrack mini | long

installation

luminaire specs

delivered lumen	up to 925lm		
watts	up to 13W		
efficacy	91lm/W		
CRI	90+	97	
R9 value	CRI 90+: >50	CRI 97: >91	
CBCP	10° pc: 6731cd	20° pc: 6280cd	
	40° pc: 1969cd	60° pc: 845cd	
	40° glass: 1852cd		
color temperature (CCT)	2700K	3000K	3500K
	dim 2 warm: 3000K > 1800K		
color consistency	2-step SDCM		
driver input voltage	120V		
dimming	DALI/0-10V		
power supply	driver included		
optics	10° / 20° / 40° / 60°		
adjustability	rotation 360°	tilt 90°	
suitable for	dry locations (IP20)		
panel thickness	no panel thickness limitations		
L80	>55000 h		

installation acc. (not incl.)	acrotrack overview ↗	
material	aluminum	brass
aluminum finishes	black ano	white struc
	brushed steel	brushed grey
	brushed bronze	
aluminum weight	0.91 lb (0.41 kg)	
brass finishes	brushed nickel	light bronze
	dark bronze	canon de fusil dark
	canon de fusil light	
brass weight	1.65 lb (0.75 kg)	
general listings	UL Listed	California Title 24
warranty	1 year (5 year on LED) ↗	

Respect distances, cable sections and IP ratings.
Split AC and DC to prevent LED glowing.

configure yours

21040 · -- · --- · --- · ---

product	variant	CRI	CCT *	beam	dimming	finish	
21040. acrotrack mini	03. long alu	1 90+	01. 2700K	03 20° pc	1. DALI - black adapter	001 black ano	
			02. 3000K	06 40° pc	2. 0-10V - black adapter	002 white struc	
			03. 3500K	07 40° glass	3. DALI - white adapter	003 brushed steel	
			09 60° pc	4. 0-10V - white adapter	004 brushed grey		
					005 brushed bronze		
		90. dim 2 warm	07 40° glass	1. DALI - black adapter	001 black ano		
			2. 0-10V - black adapter	002 white struc			
			3. DALI - white adapter	003 brushed steel			
			4. 0-10V - white adapter	004 brushed grey			
				005 brushed bronze			
			2 97	01. 2700K	01 10° pc	1. DALI - black adapter	001 black ano
				02. 3000K	03 20° pc	2. 0-10V - black adapter	002 white struc
03. 3500K				06 40° pc	3. DALI - white adapter	003 brushed steel	
			07 40° glass	4. 0-10V - white adapter	004 brushed grey		
			09 60° pc		005 brushed bronze		
	06. long brass	1 90+	90. dim 2 warm	07 40° glass	1. DALI - black adapter	701 brushed nickel	
					2. 0-10V - black adapter	702 light bronze	
					3. DALI - white adapter	703 dark bronze	
			4. 0-10V - white adapter	704 canon de fusil dark			
				705 canon de fusil light			
		2 97			1. DALI - black adapter	701 brushed nickel	
					2. 0-10V - black adapter	702 light bronze	
					3. DALI - white adapter	703 dark bronze	
			4. 0-10V - white adapter	704 canon de fusil dark			
				705 canon de fusil light			

* other CCT available on request

finishes

aluminum

white struc (RAL 9003)



brushed steel



brushed bronze



brushed grey



black ano



custom brass


brushed nickel



light bronze



dark bronze



canon de fusil light




canon de fusil dark




Custom RAL and brass finishes available on request.

correlated color temperature (CCT)


2700K: extra warm white




3000K: warm white



3500K: neutral white



dim 2 warm: 3000K > 1800K




beam angle


	10° pc	20° pc	40° pc	60° pc	40° glass	dim 2 warm (40° glass)
long alu	350mA max	500mA max	500mA max	500mA max	700mA max	350mA max
long brass	350mA max	500mA max	500mA max	500mA max	700mA max	350mA max

luminaire output


		350mA			500mA		700mA
		(6.6W, 19.9Vf)	(6.4W, 18.3Vf)	(6.0W, 17.1Vf)	(9.7W, 19.4Vf)	(8.9W, 17.8Vf)	(13.0W, 18.6Vf)
2700K	10° pc	475lm	-	-	-	-	-
	20° pc	-	550lm	-	750lm	-	-
	40° pc	-	550lm	-	750lm	-	-
	60° pc	-	500lm	-	675lm	-	-
	40° glass	-	-	475lm	-	650lm	850lm
3000K	10° pc	500lm	-	-	-	-	-
	20° pc	-	575lm	-	775lm	-	-
	40° pc	-	575lm	-	775lm	-	-
	60° pc	-	525lm	-	700lm	-	-
	40° glass	-	-	500lm	-	675lm	900lm
3500K	10° pc	525lm	-	-	-	-	-
	20° pc	-	600lm	-	800lm	-	-
	40° pc	-	600lm	-	800lm	-	-
	60° pc	-	550lm	-	725lm	-	-
	40° glass	-	-	525lm	-	700lm	925lm
dim 2 warm	40° glass	-	-	425lm	-	-	-

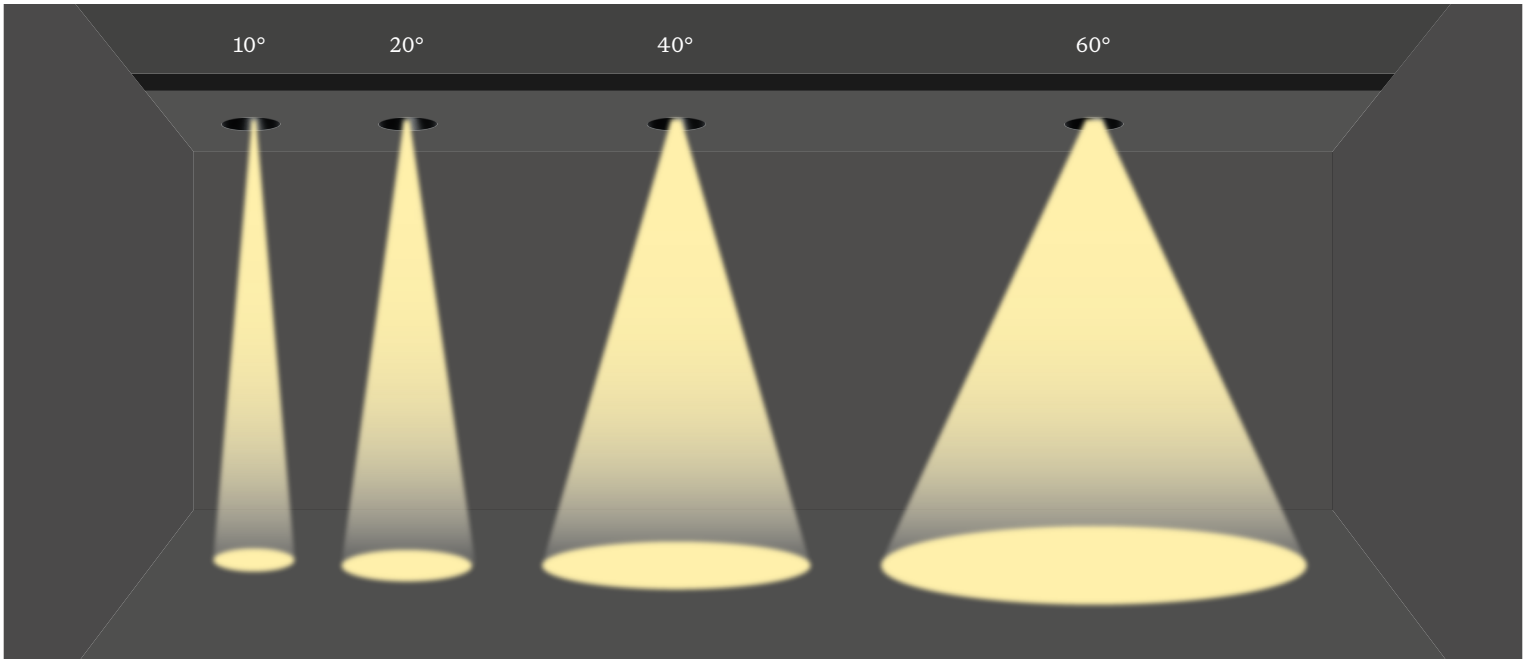


10° pc

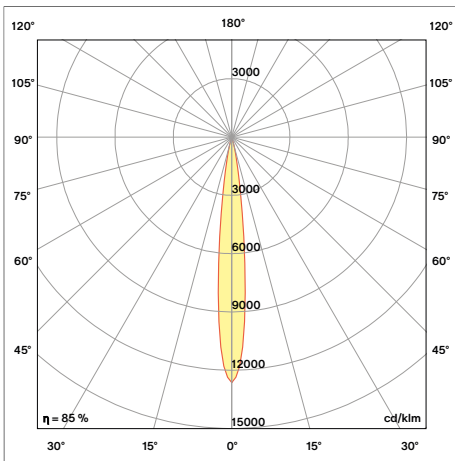


20° pc

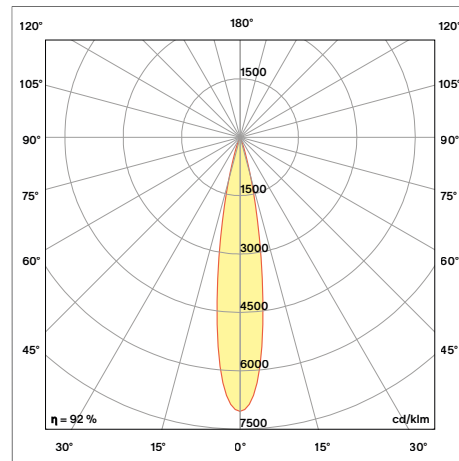


40° pc

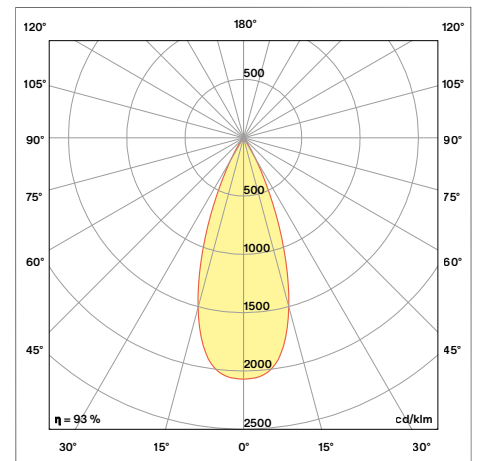


60° pc

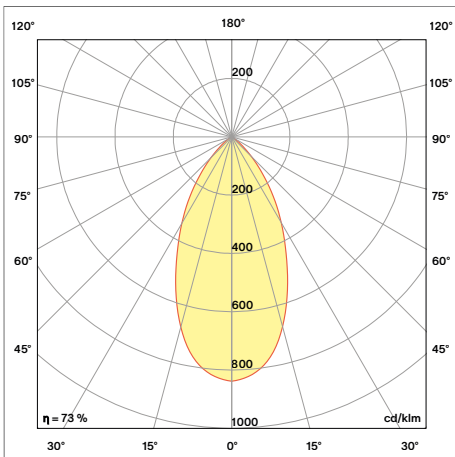

40° glass

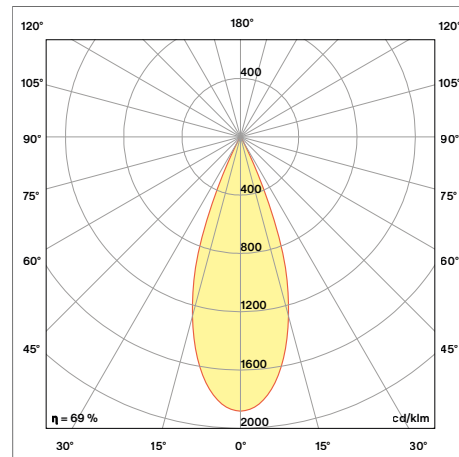


dim 2 warm (40° glass)

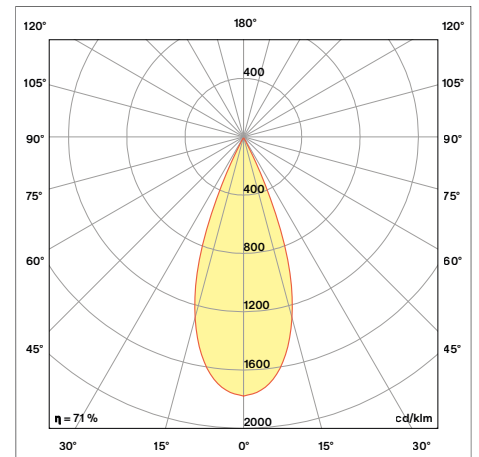



accessories

drivers (incl.)	Title 24 JA8 compliant	UL listed	product code
48V track driver 100W	no	yes	9000-1027



acrotrack - accessories

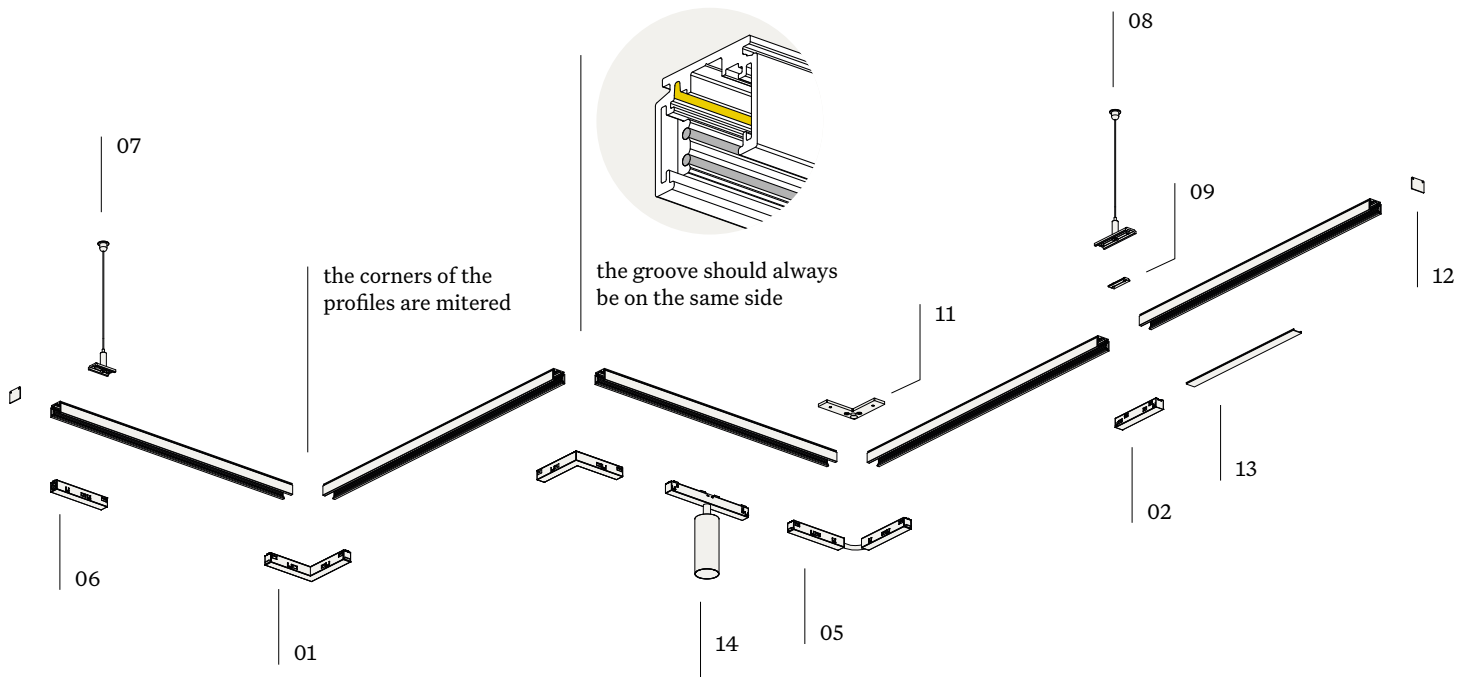


legend	product code	
01 L feed	8000-1314 (black)	8000-2868 (white)
02 middle feed	8000-1313 (black)	8000-2867 (white)
03 X feed	8000-7462 (black)	8000-8166 (white)
04 T feed	8000-8161 (black)	8000-8052 (white)
05 adjustable corner	8000-5275 (black)	8000-8167 (white)
06 end feed	8000-1312 (black)	8000-2866 (white)
07 pendant kit end	8000-3094	
08 pendant kit middle	8000-3095	
09 trimless middle bracket	8000-2871 (black)	8000-3012 (white)
10 trimless bracket (4 pcs)	8000-2870	
11 trimless L-bracket	8000-2869	
12 end cap surface	8000-1310 (black)	8000-2865 (white)
end cap pendant	8000-5275 (black)	8000-3096 (white)
end cap trimless	8000-2860 (black)	8000-2862 (white)
end cap trim	8000-5275 (black)	8000-8167 (white)
13 aesthetic cover	8000-6836 (black)	8000-6837 (white)
14 acrotrack fixture	acrotrack mini long	acrotrack mini short

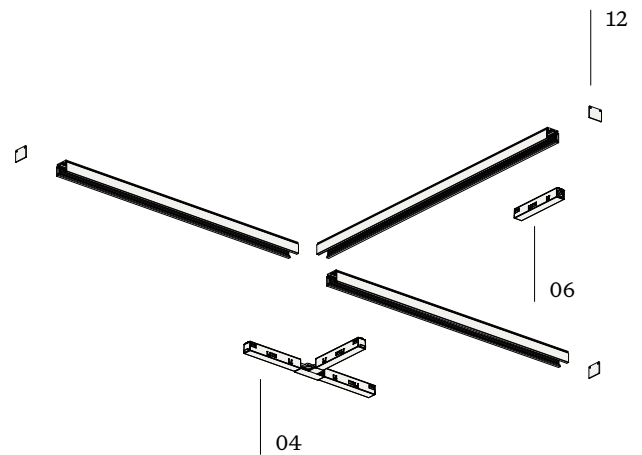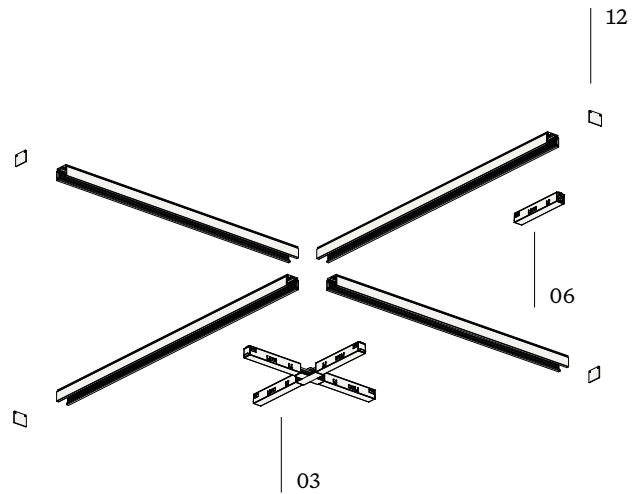


track polarity

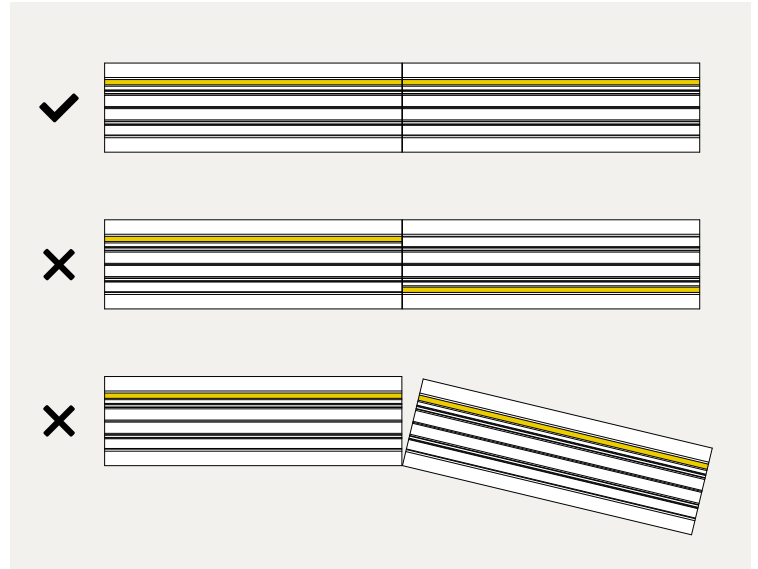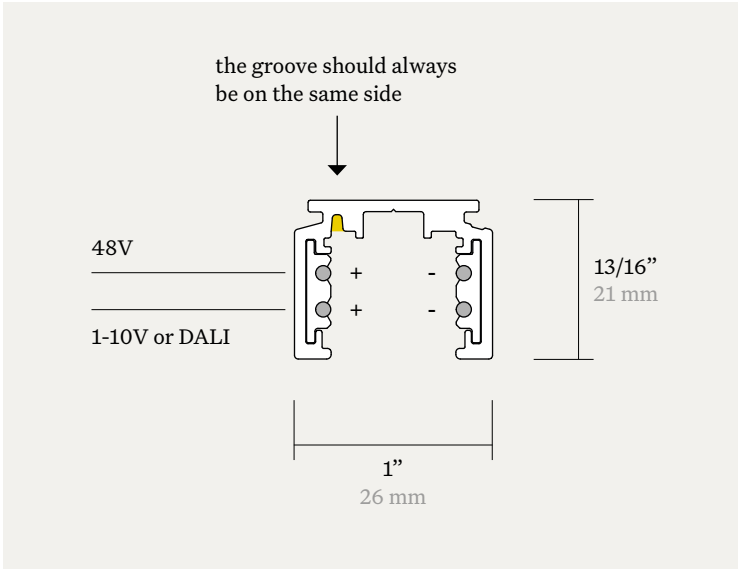

middle feed

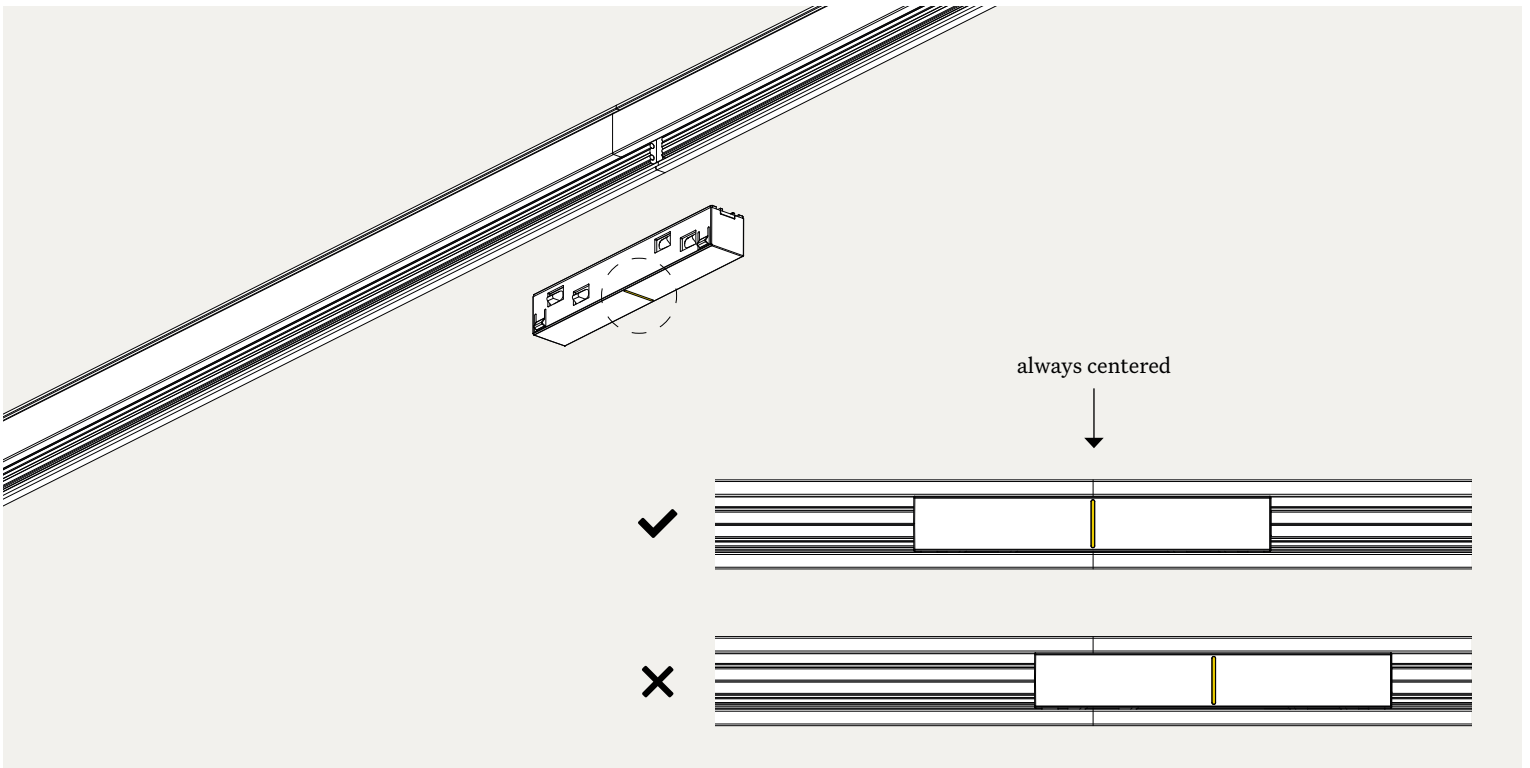


acrotrack - profiles

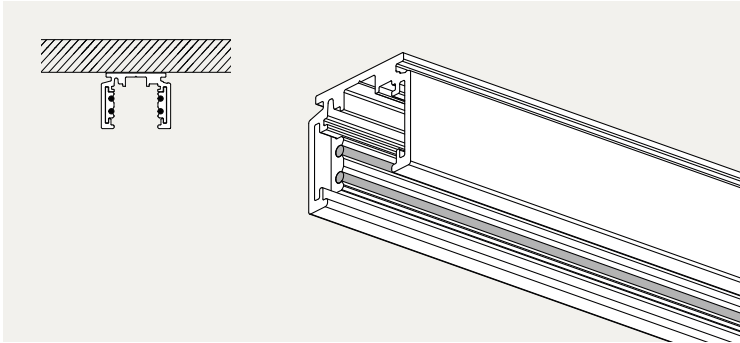


surface

application	ceiling indoor (surface)	
dimensions (w x h)	1-1/32 x 13/16" (26 x 21 mm)	
product code *	(4 ft) 9000-1301 (black)	9000-1302 (white)
	(8 ft) 9000-1309 (black)	9000-1310 (white)

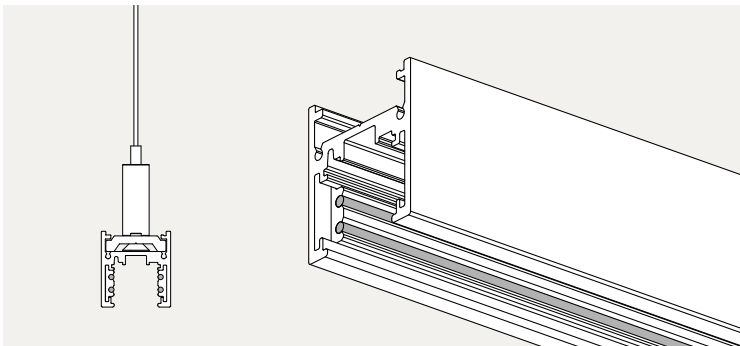


pendant

application	ceiling indoor (pendant)	
dimensions (w x h)	1-1/32 x 1-1/8" (26 x 29 mm)	
product code *	(4 ft) 9000-1305 (black)	9000-1306 (white)
	(8 ft) 9000-1313 (black)	9000-1314 (white)

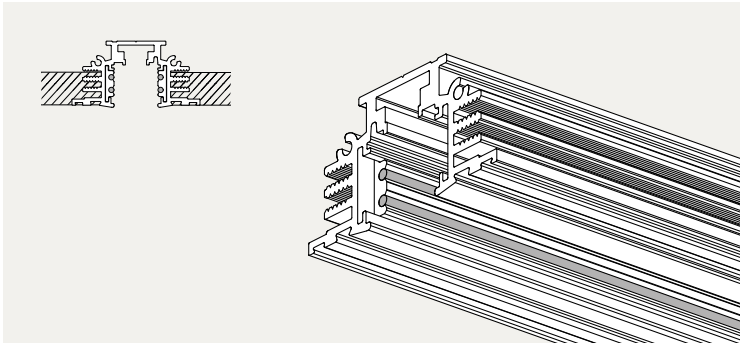

trimless

application	ceiling indoor (plastered ceiling)	
dimensions (w x h)	1-9/10 x 1" (48 x 25 mm)	
product code *	(4 ft) 9000-1303 (black)	9000-1304 (white)
	(8 ft) 9000-1311 (black)	9000-1312 (white)


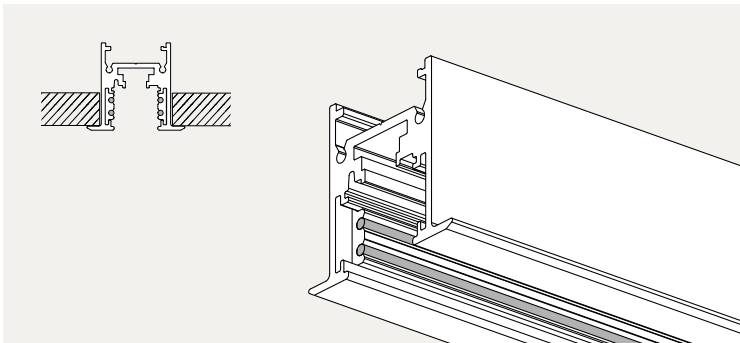


trim


application	ceiling indoor (plastered ceiling)	
dimensions (w x h)	1-7/16 x 1-3/10" (37 x 33 mm)	
product code *	(4 ft) 9000-1307 (black)	9000-1308 (white)
	(8 ft) 9000-1315 (black)	9000-1316 (white)

* Custom RAL finishes available on request.


surface ceiling fixation

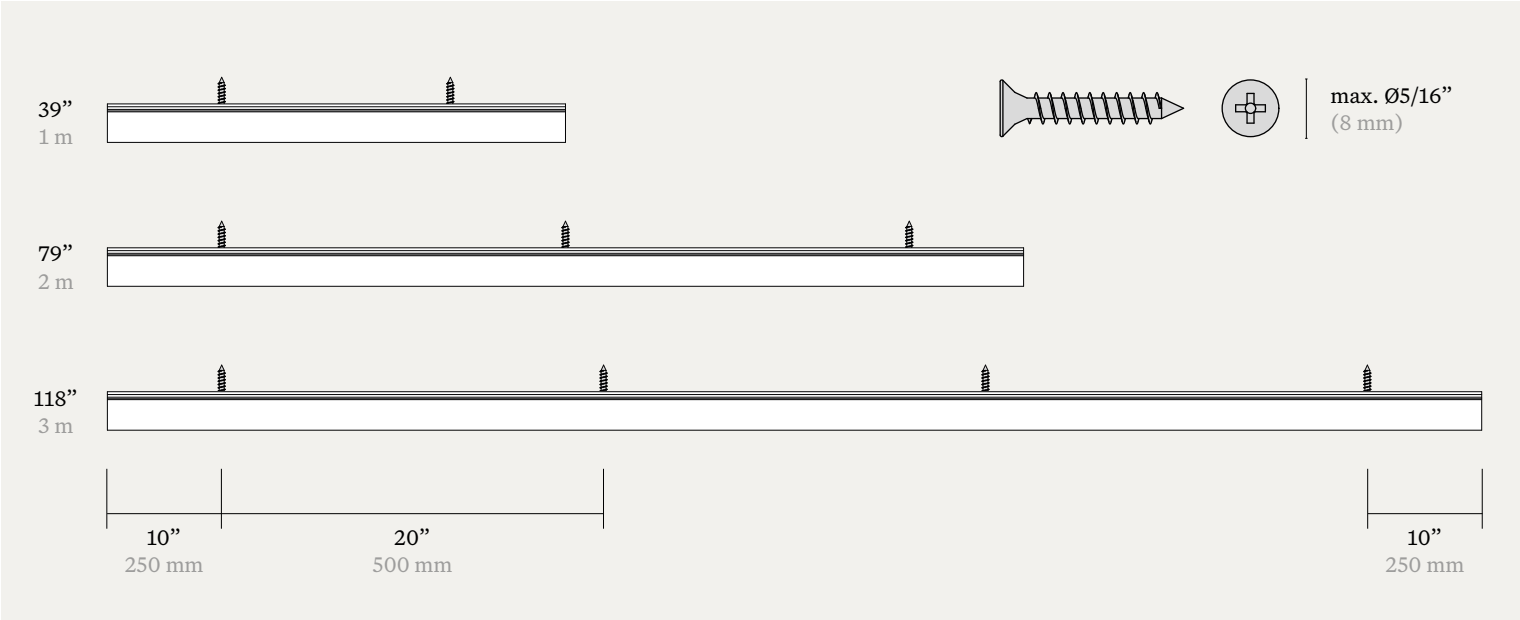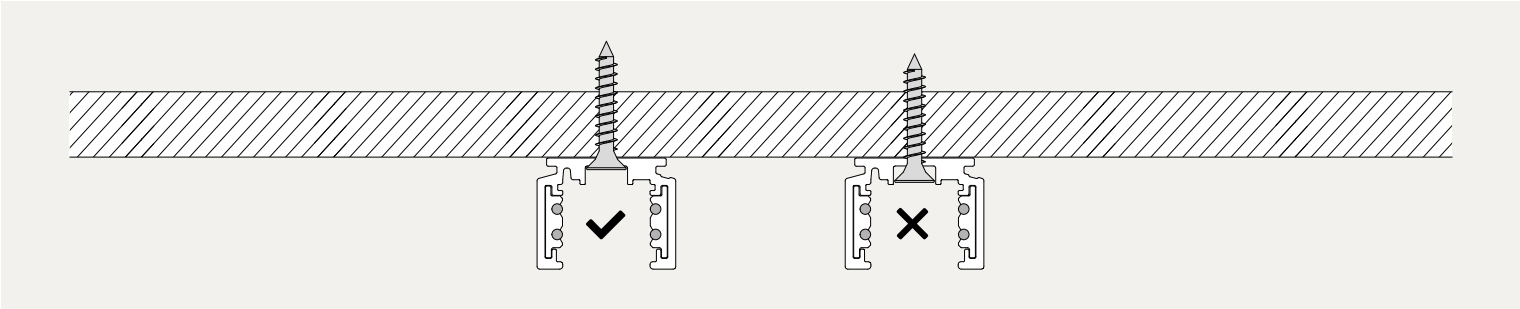


pendant ceiling fixation

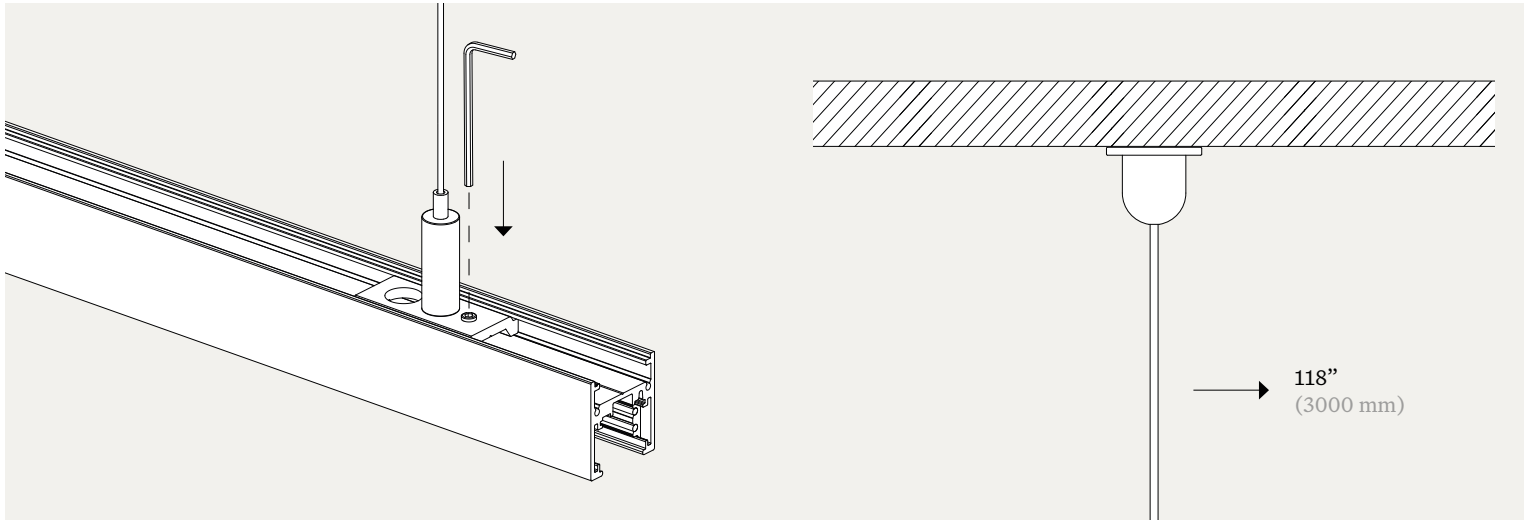


max. load

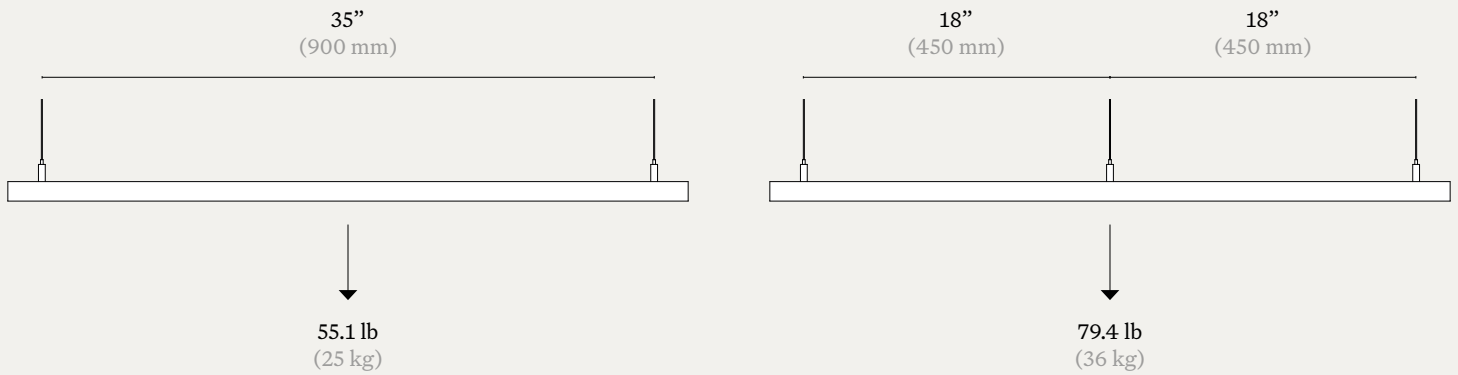

distributed load

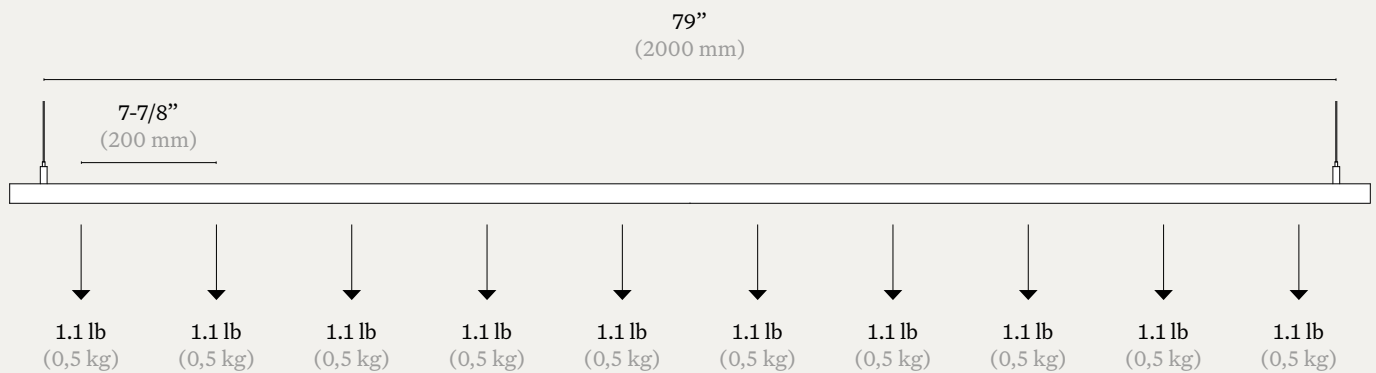

trimless ceiling fixation

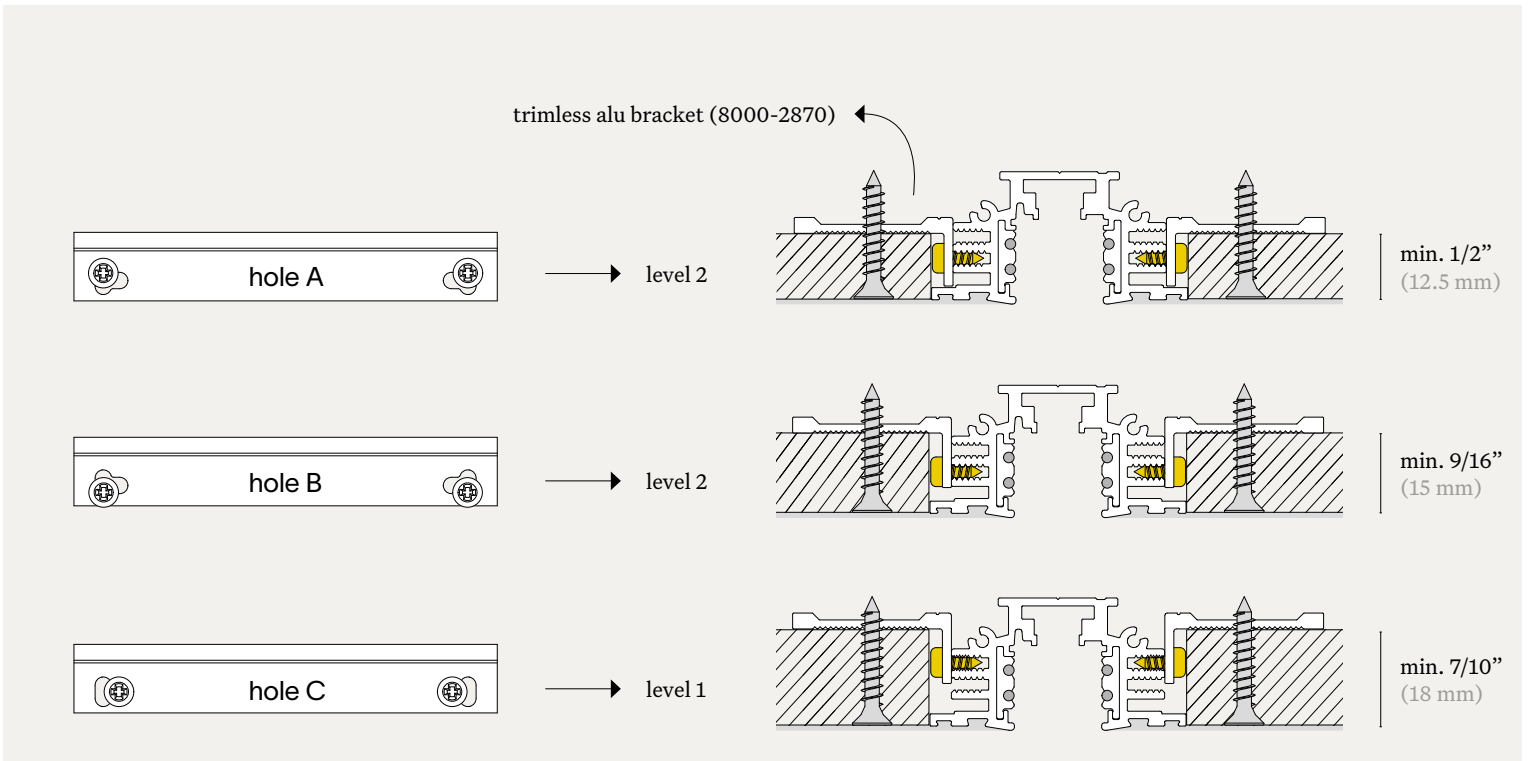

trim ceiling fixation

