


acrotrack mini | short

We aim to create cleaner ceilings.
Show what you want, hide what you need.



luminaire specs	3
configure yours	4
finishes	5
luminaire output	6
accessories	8
acrotrack overview	9

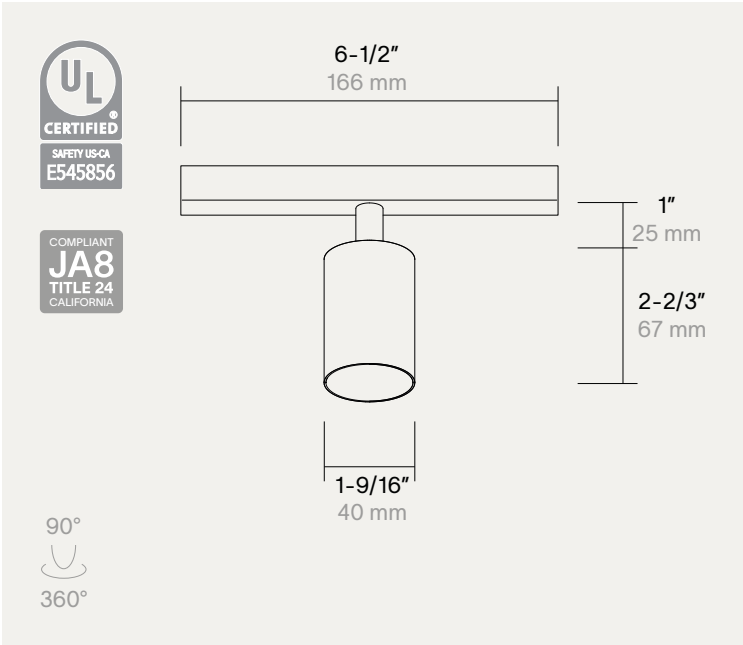

acrotrack mini | short

installation

luminaire specs

delivered lumen	up to 700lm		
watts	up to 8.9W		
efficacy	101lm/W		
CRI	90+	97	
R9 value	CRI 90+: >50	CRI 97: >91	
CBCP	10° pc: 6731cd	20° pc: 4655cd	
	40° pc: 1373cd	60° pc: 627cd	
	40° glass: 2036cd		
color temperature (CCT)	2700K	3000K	3500K
	dim 2 warm: 3000K > 1800K		
color consistency	2-step SDCM		
driver input voltage	120V		
dimming	DALI/0-10V		
power supply	driver included		
optics	10° / 20° / 40° / 60°		
adjustability	rotation 360°	tilt 90°	
suitable for	dry locations (IP20)		
panel thickness	no panel thickness limitations		
L80	>55000 h		

installation acc. (not incl.)	acrotrack overview ↗	
material	aluminum	brass
aluminum finishes	black ano	white struc
	brushed steel	brushed grey
	brushed bronze	
aluminum weight	0.70 lb (0.32 kg)	
brass finishes	brushed nickel	light bronze
	dark bronze	canon de fusil dark
	canon de fusil light	
brass weight	1.40 lb (0.64 kg)	
general listings	UL Listed	California Title 24
warranty	1 year (5 year on LED) ↗	

Respect distances, cable sections and IP ratings.
Split AC and DC to prevent LED glowing.

configure yours

21040

--

product		variant	CRI		CCT *		beam		dimming	finish	
21040.	acrotrack mini	05. short alu	1	90+	01.	2700K	03	20° pc	1. DALI - black adapter	001	black ano
					02.	3000K	06	40° pc	2. 0-10V - black adapter	002	white struc
					03.	3500K	07	40° glass	3. DALI - white adapter	003	brushed steel
							09	60° pc	4. 0-10V - white adapter	004	brushed grey
										005	brushed bronze
					90.	dim 2 warm	07	40° glass	1. DALI - black adapter	001	black ano
		08. short brass	1	90+					2. 0-10V - black adapter	002	white struc
									3. DALI - white adapter	003	brushed steel
									4. 0-10V - white adapter	004	brushed grey
										005	brushed bronze
		08. short brass	2	97	01.	2700K	01	10° pc	1. DALI - black adapter	001	black ano
					02.	3000K	03	20° pc	2. 0-10V - black adapter	002	white struc
					03.	3500K	06	40° pc	3. DALI - white adapter	003	brushed steel
							07	40° glass	4. 0-10V - white adapter	004	brushed grey
							09	60° pc		005	brushed bronze
		08. short brass	2	97	01.	2700K	01	10° pc	1. DALI - black adapter	701	brushed nickel
					02.	3000K	03	20° pc	2. 0-10V - black adapter	702	light bronze
					03.	3500K	06	40° pc	3. DALI - white adapter	703	dark bronze
							07	40° glass	4. 0-10V - white adapter	704	canon de fusil dark
							09	60° pc		705	canon de fusil light

* other CCT available on request

finishes

aluminum

white struc (RAL 9003)



brushed steel



brushed bronze



brushed grey



black ano



custom brass

brushed nickel



light bronze



dark bronze



canon de fusil light




canon de fusil dark




Custom RAL and brass finishes available on request.

correlated color temperature (CCT)


2700K: extra warm white




3000K: warm white




3500K: neutral white




dim 2 warm: 3000K > 1800K




beam angle							
		10° pc	20° pc	40° pc	60° pc	40° glass	dim 2 warm (40° glass)
long alu		350mA max	350mA max	350mA max	350mA max	500mA max	350mA max
long brass		350mA max	350mA max	350mA max	350mA max	500mA max	350mA max
luminaire output							
		350mA		500mA			
		(6.6W, 19.9Vf)	(6.4W, 18.3Vf)	(6.0W, 17.1Vf)	(8.9W, 17.8Vf)		
2700K	10° pc	475lm	-	-	-		
	20° pc	-	550lm	-	-		
	40° pc	-	550lm	-	-		
	60° pc	-	500lm	-	-		
	40° glass	-	-	475lm	650lm		
3000K	10° pc	500lm	-	-	-		
	20° pc	-	575lm	-	-		
	40° pc	-	575lm	-	-		
	60° pc	-	525lm	-	-		
	40° glass	-	-	500lm	675lm		
3500K	10° pc	525lm	-	-	-		
	20° pc	-	600lm	-	-		
	40° pc	-	600lm	-	-		
	60° pc	-	550lm	-	-		
	40° glass	-	-	525lm	700lm		
dim 2 warm	40° glass	-	-	425lm	-		

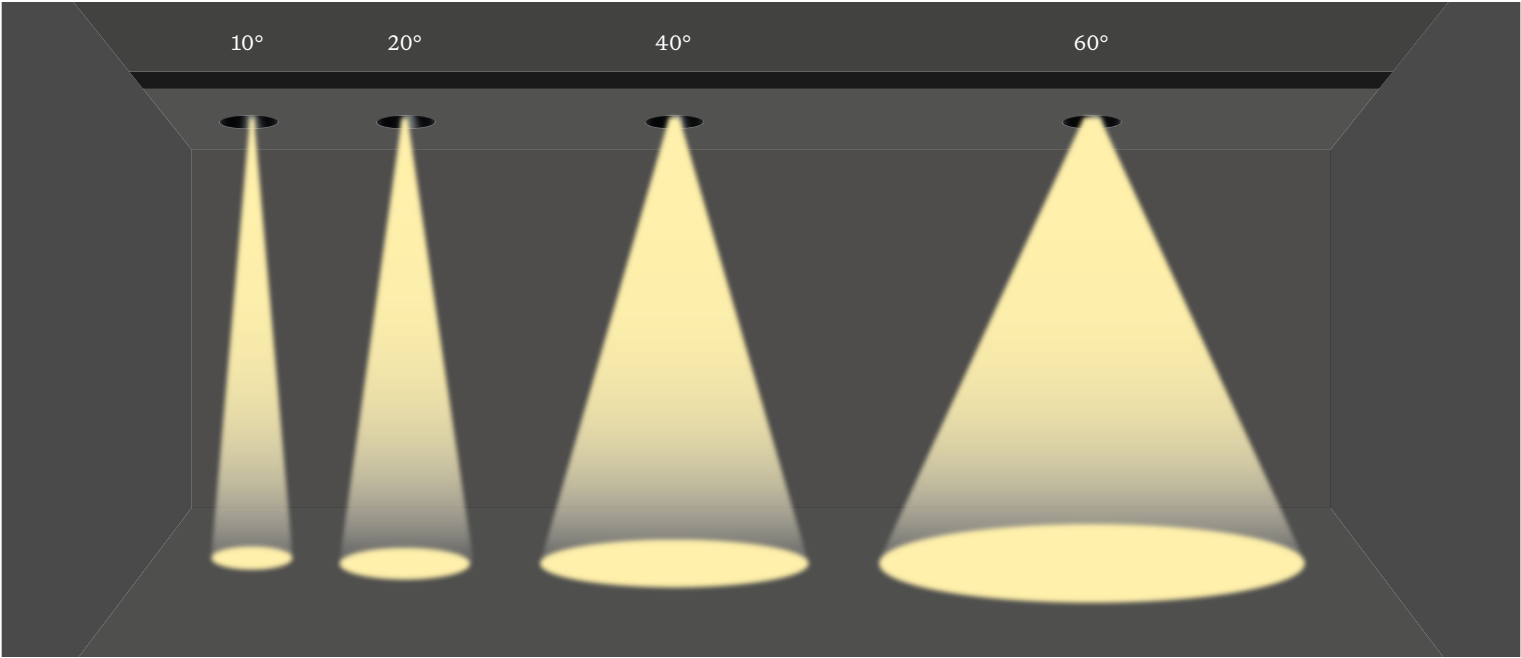


10° pc

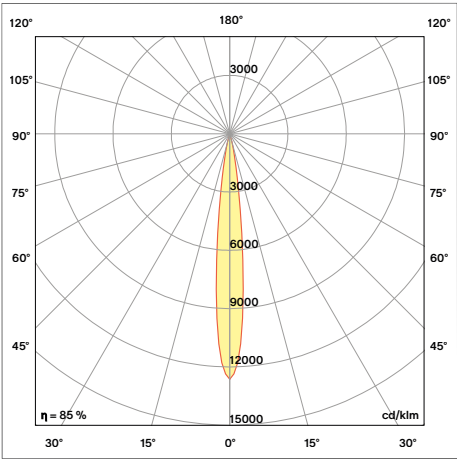


20° pc

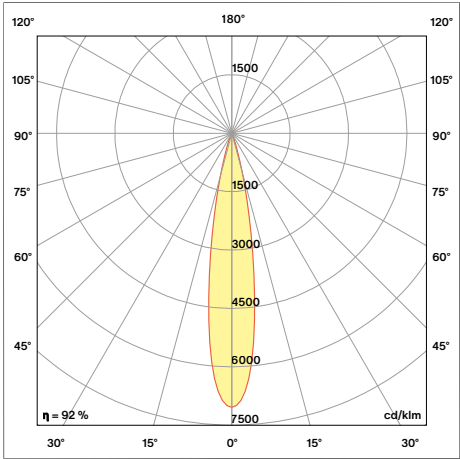


40° pc

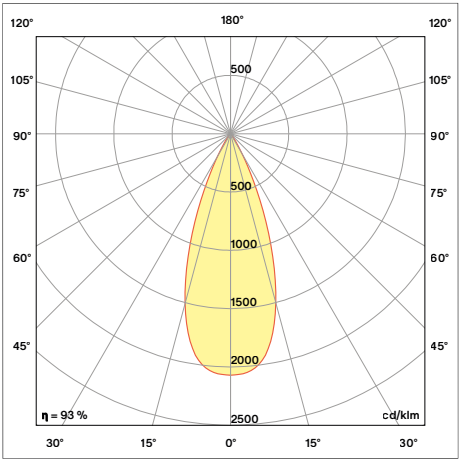


60° pc

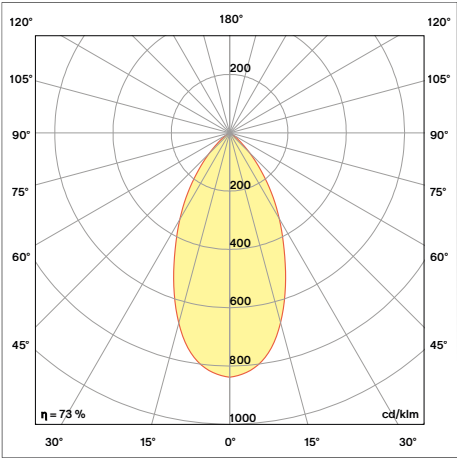

40° glass

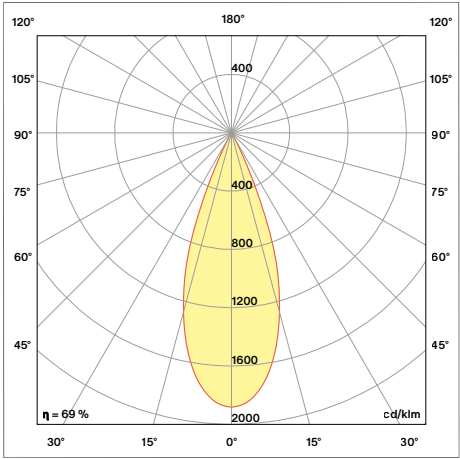


dim 2 warm (40° glass)

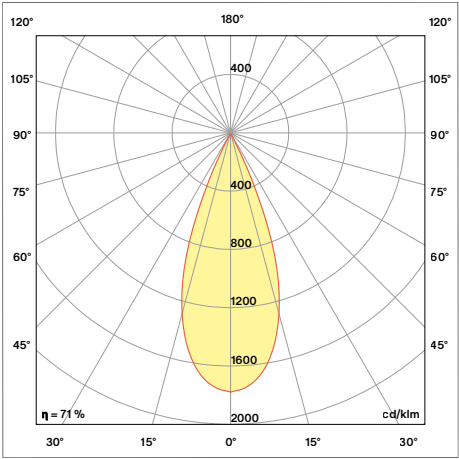


accessories

drivers (incl.)	Title 24 JA8 compliant	UL listed	product code
48V track driver 100W	no	yes	9000-1027



acrotrack - accessories

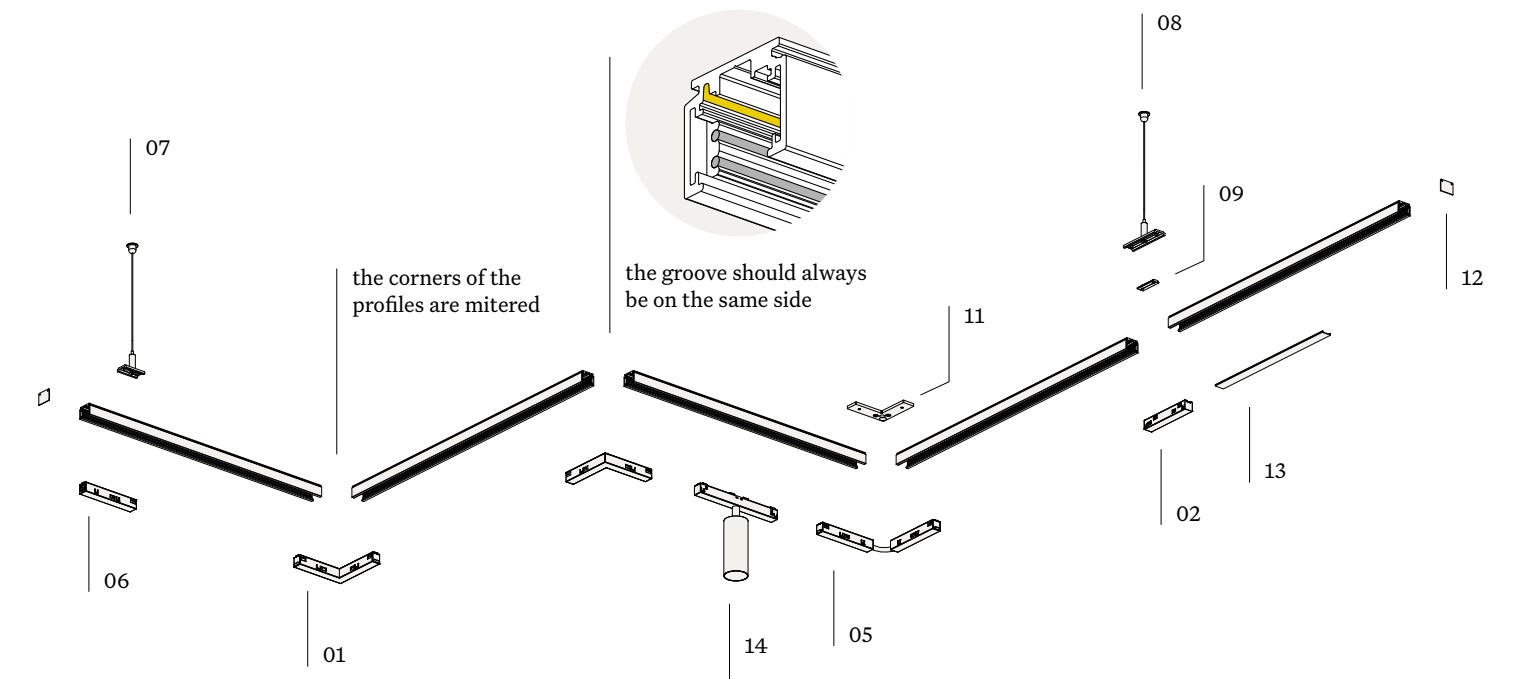


legend		product code	
01	L feed	8000-1314 (black)	8000-2868 (white)
02	middle feed	8000-1313 (black)	8000-2867 (white)
03	X feed	8000-7462 (black)	8000-8166 (white)
04	T feed	8000-8161 (black)	8000-8052 (white)
05	adjustable corner	8000-5275 (black)	8000-8167 (white)
06	end feed	8000-1312 (black)	8000-2866 (white)
07	pendant kit end	8000-3094	
08	pendant kit middle	8000-3095	
09	trimless middle bracket	8000-2871 (black)	8000-3012 (white)
10	trimless bracket (4 pcs)	8000-2870	
11	trimless L-bracket	8000-2869	
12	end cap surface	8000-1310 (black)	8000-2865 (white)
	end cap pendant	8000-5275 (black)	8000-3096 (white)
	end cap trimless	8000-2860 (black)	8000-2862 (white)
	end cap trim	8000-5275 (black)	8000-8167 (white)
13	aesthetic cover	8000-6836 (black)	8000-6837 (white)
14	acrotrack fixture	acrotrack mini long	acrotrack mini short

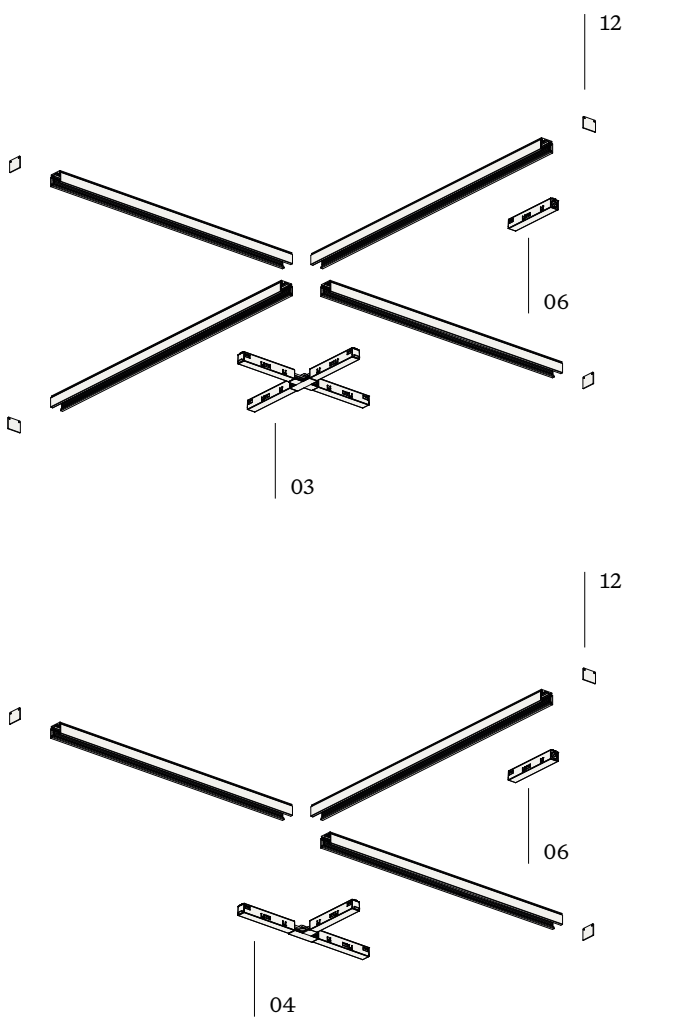


track polarity

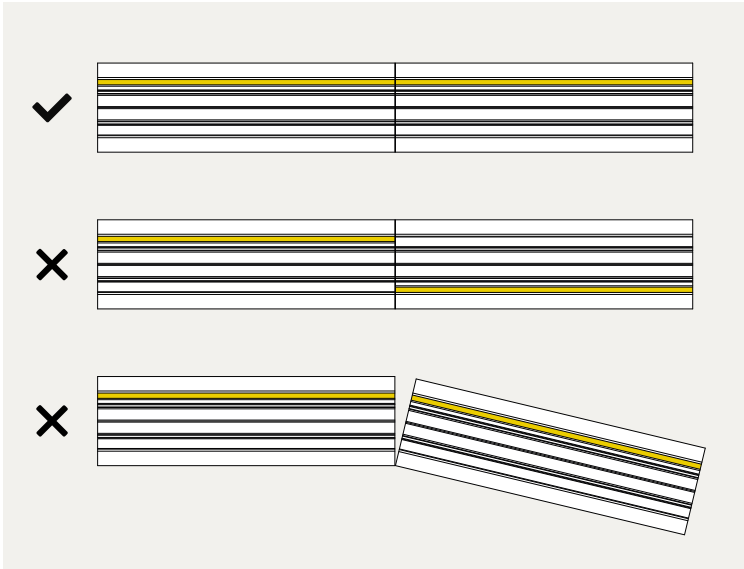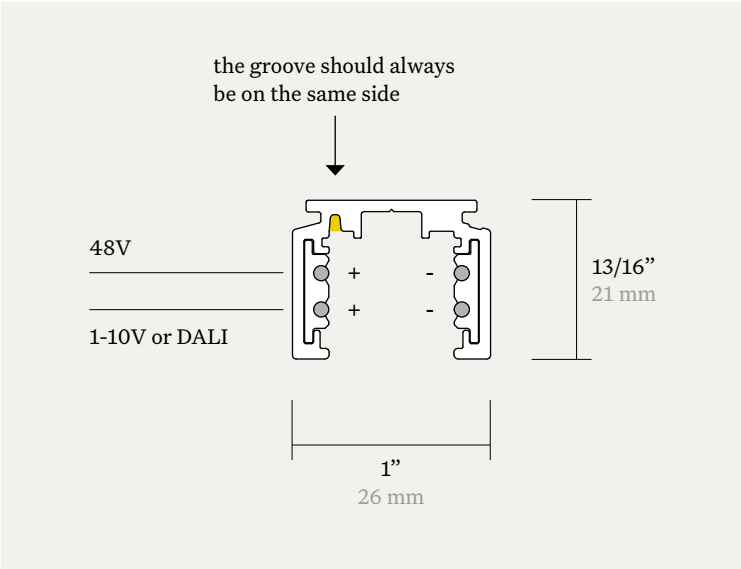

middle feed

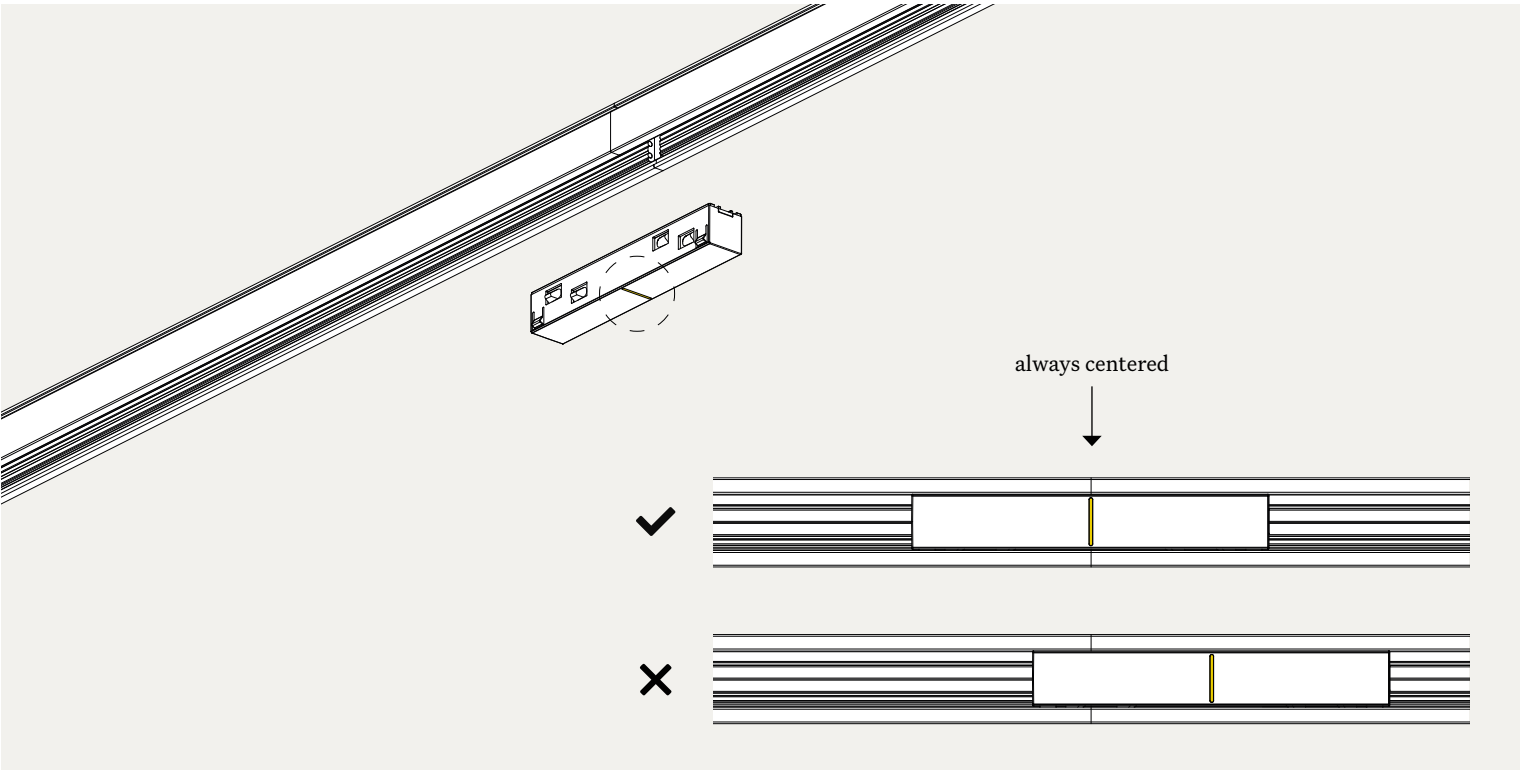


acrotrack - profiles

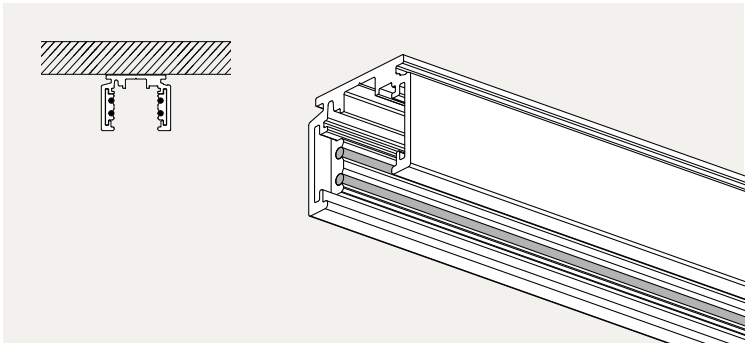


surface

application	ceiling indoor (surface)		
dimensions (w x h)	1-1/32 x 13/16" (26 x 21 mm)		
product code *	(4 ft)	9000-1301 (black)	9000-1302 (white)
	(8 ft)	9000-1309 (black)	9000-1310 (white)

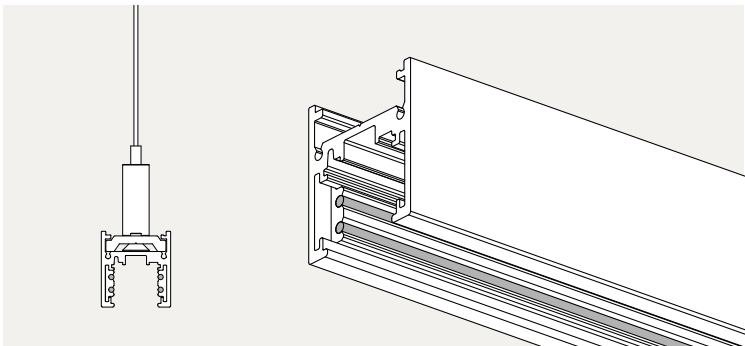


pendant

application	ceiling indoor (pendant)		
dimensions (w x h)	1-1/32 x 1-1/8" (26 x 29 mm)		
product code *	(4 ft)	9000-1305 (black)	9000-1306 (white)
	(8 ft)	9000-1313 (black)	9000-1314 (white)

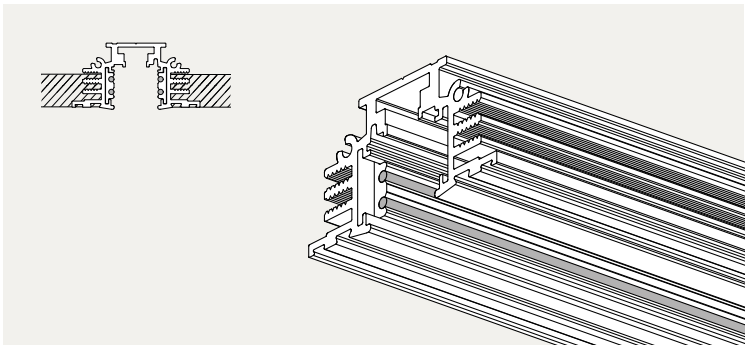

trimless

application	ceiling indoor (plastered ceiling)		
dimensions (w x h)	1-9/10 x 1" (48 x 25 mm)		
product code *	(4 ft)	9000-1303 (black)	9000-1304 (white)
	(8 ft)	9000-1311 (black)	9000-1312 (white)


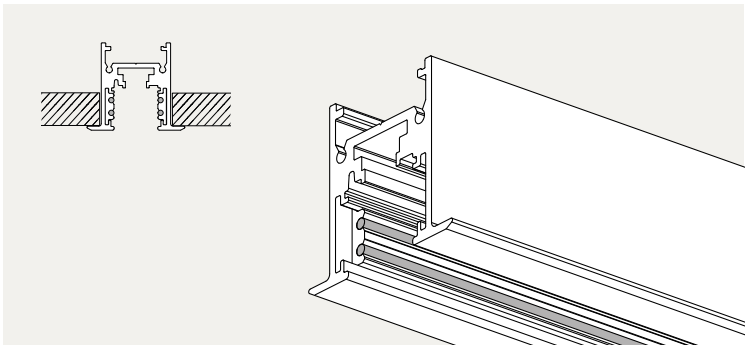


trim


application	ceiling indoor (plastered ceiling)		
dimensions (w x h)	1-7/16 x 1-3/10" (37 x 33 mm)		
product code *	(4 ft)	9000-1307 (black)	9000-1308 (white)
	(8 ft)	9000-1315 (black)	9000-1316 (white)

* Custom RAL finishes available on request.


surface ceiling fixation

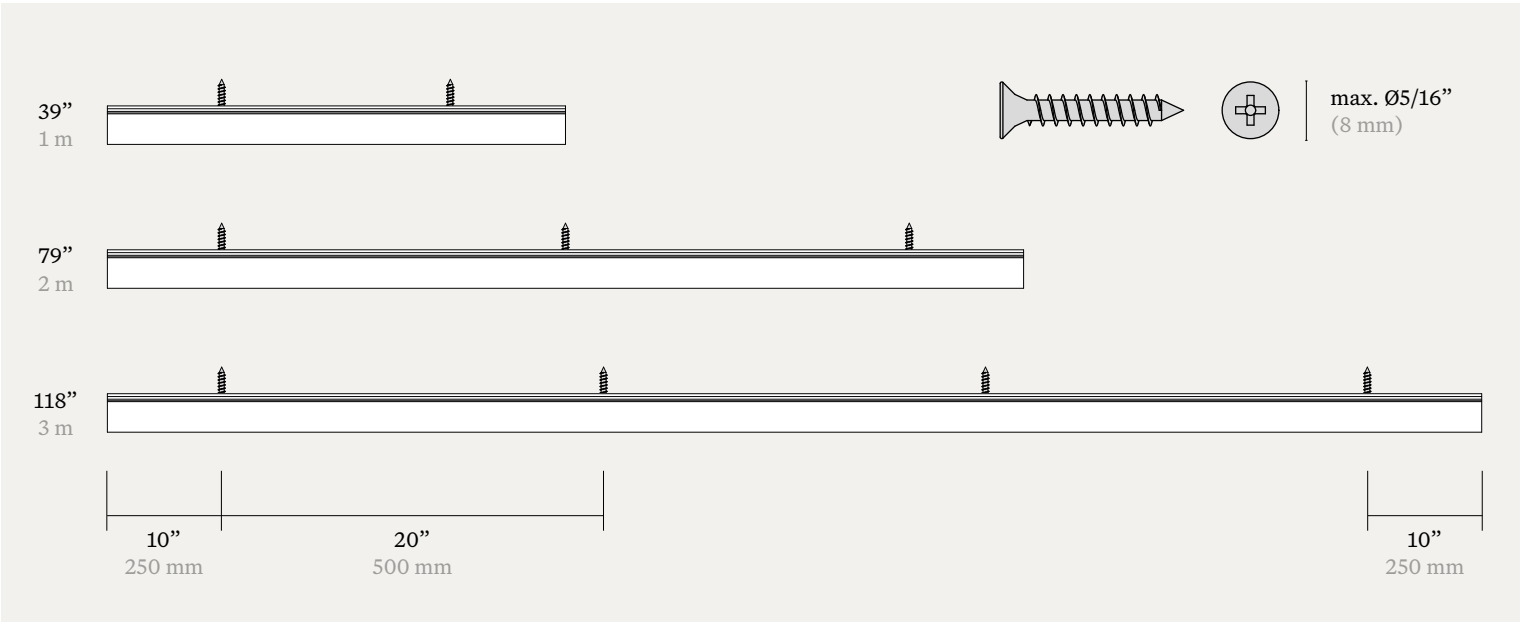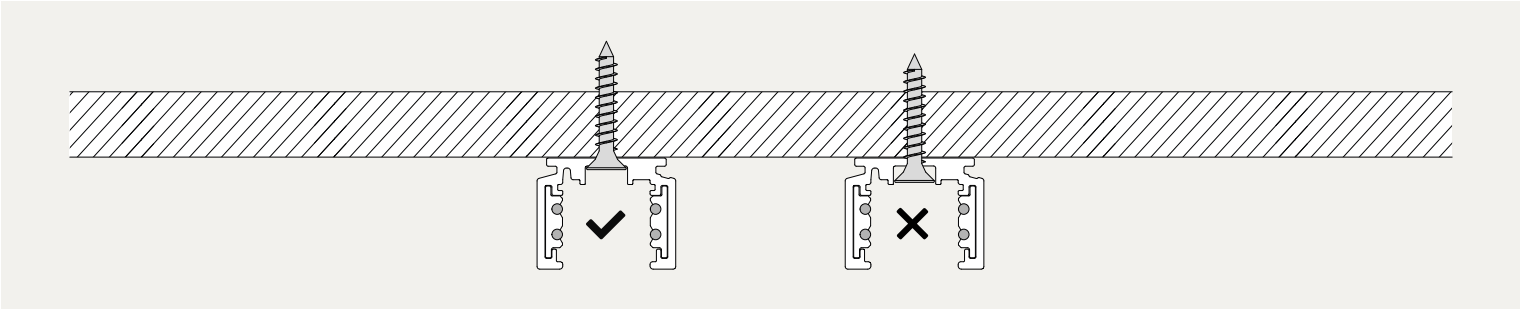


pendant ceiling fixation

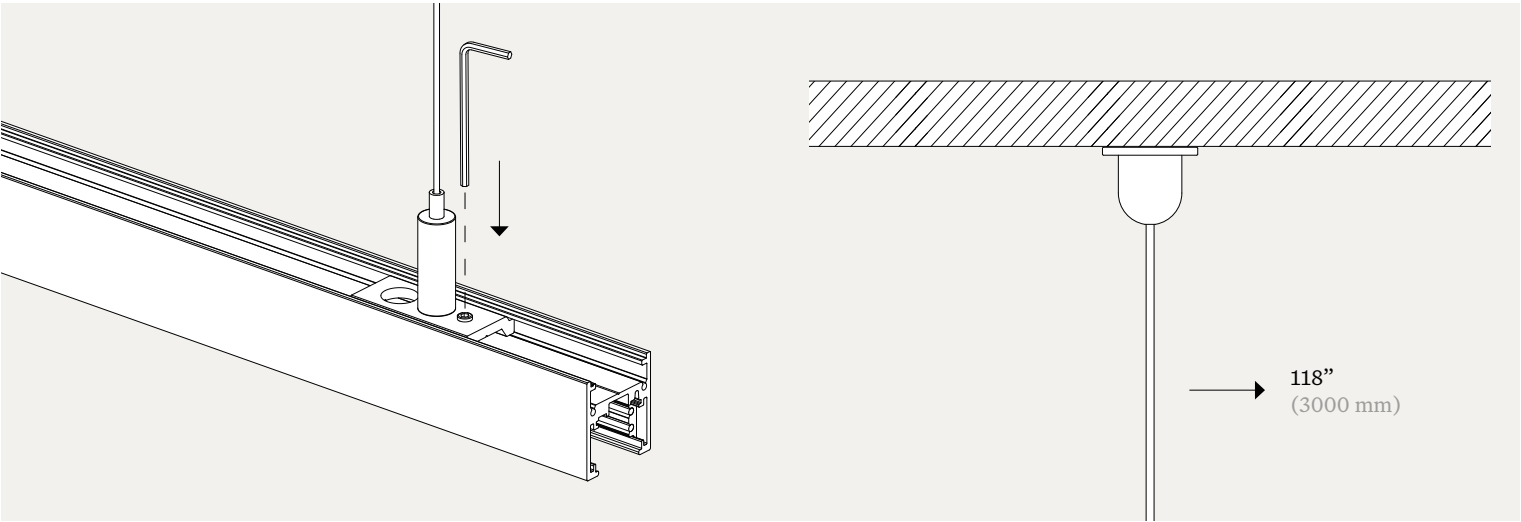


max. load

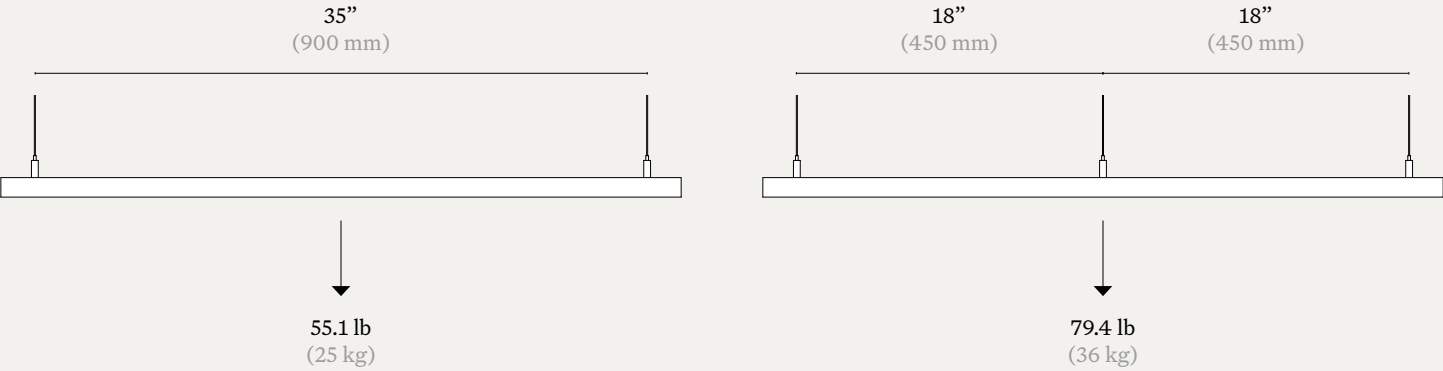

distributed load

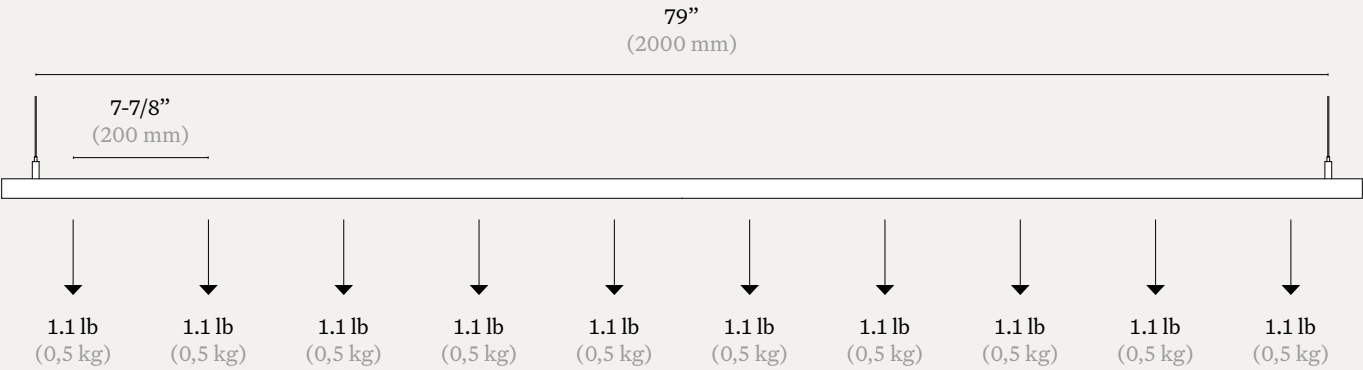

trimless ceiling fixation

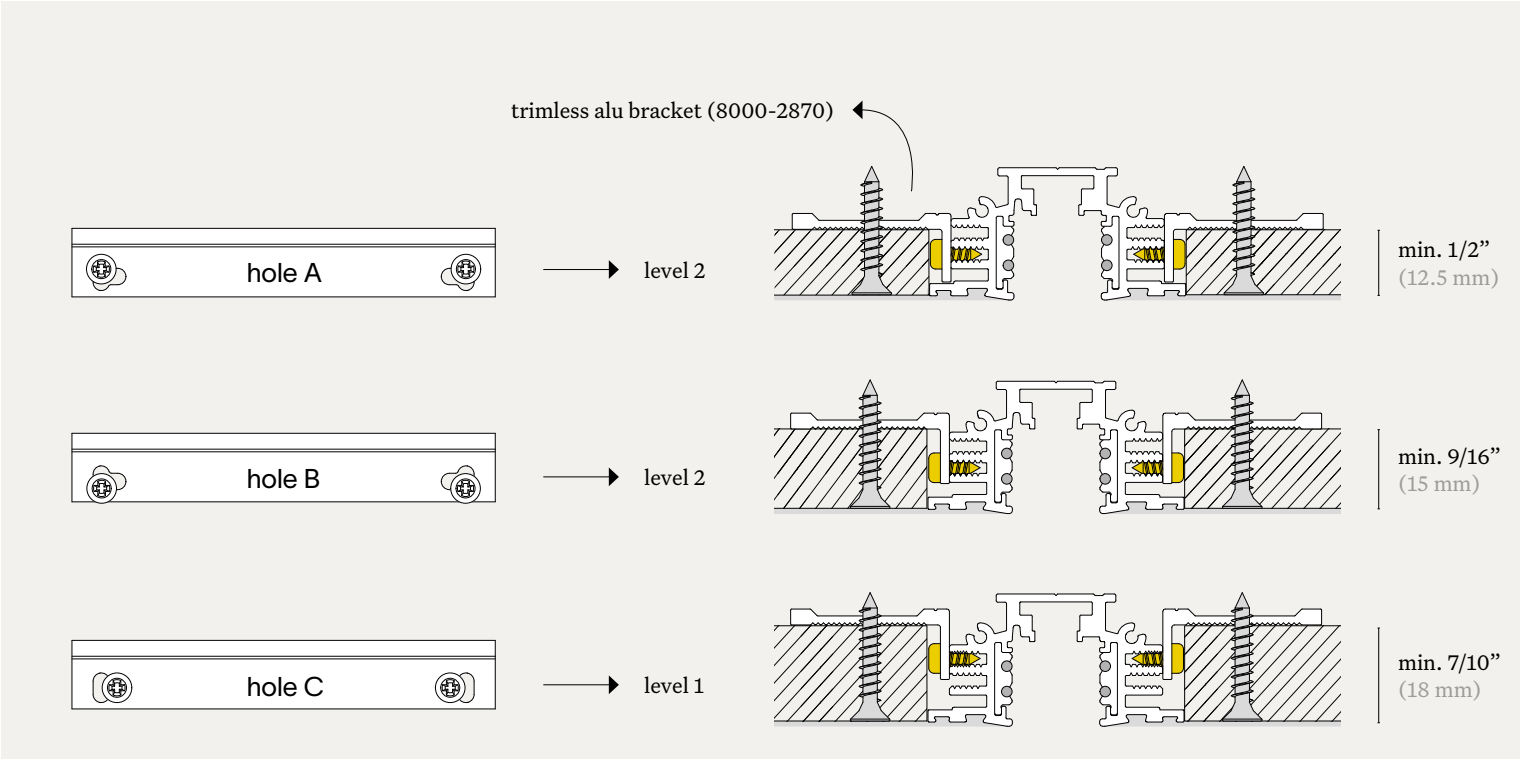

trim ceiling fixation

